

February 8th, 2008
CSB070002

Thomas Andrews
Project Engineer
New Mexico Environmental Department
Construction Programs Bureau
1190 St. Francis Drive
PO Box 26110
Santa Fe, NM 87502-6110

Subject: Response to Wastewater PER Comments

Dear Tom:

Nolte Associates, Inc. has received your comments dated October 9, 2007 regarding the Wastewater Preliminary Engineering Report submitted to the Construction Programs Bureau on October 4, 2007 and offers the following responses.

1. *Page 3: Please cite the source of the 20,000 visitors between mid-May and mid-September.*

The source of the 20,000 visitors between mid-May and mid-September is the Village of Cimarron 40-Year Water Plan prepared by Daniel B. Stephens & Associates, Inc. on April 30, 1998. Most of this influx is due to the close proximity of the Philmont Boy Scout Ranch.

2. *Page 5: Please include the results of the Sewer Cleaning and CCTV and I/I analysis including estimates of actual current wastewater flows to the treatment system in this Report.*

As discussed, the results of the Sewer Cleaning and CCTV analysis will be presented as an addendum to the Revised PER.

3. *Page 6: Please add the lengths and sizes of the collection lines and force mains, lift station description, number and condition of manholes.*

This information will be submitted with the results of the Sewer Cleaning and CCTV analysis as an addendum to the Revised PER.

4. *Page 7: Please provide an estimate of the lagoon biosolids based on a depth survey or other data.*

Please see the information from Liquid Waste Management documenting the lagoon biosolids depth survey, which has been added to Appendix G.

5. *Page 8: Please indicate the debt service repayment, debt service reserve, and short lived asset reserve line items in the Village budget shown in Appendix D. These items should be part of the rate base or otherwise dedicated to the wastewater budget.*

Page 2 of the Village's Municipal Periodic Report, indicating the debt service repayment, has been added to Appendix D.

The sewer Form EP-1/EP-2 Enterprise and Utility Revenues/Transfers/Expenditures has been added to Appendix D showing the Total Expenditures budgeted in the bottom row of the sheet. The debt service reserve has also been corrected on page 8 to read 12% for consistency with page 16 and correspondence with the Village.

6. *Page 10: Please explain the need for a 12-month monitoring plan versus grab samples and inflow measurements. Proposed designs are based on an assumed 180,000 gpd or 196 gal/day-person which is approximately twice that of an urban wastewater population. Actual flows would result in lower costs for the alternatives considered presented in the Report.*

Monthly grab samples completed over a one-year period as described in the "Intermediate Projects" section of the report on page 17, allows for characterization of the wastewater through any yearly condition, which will be incredibly valuable during the design of the lagoon improvements and in the pursuit of a NPDES discharge permit to French Lake.

The flow rate of 180,000gpd was rounded from the Discharge Permit Renewal DP-1252 submitted on August 17, 2006 for discharge up to 175,000gpd.

7. *Page 15: Please describe pump station conditions and list make, model, age and maintenance history of pumps.*

The existing pump station condition and list make, model, age, and maintenance history will be included with the results of the Sewer Cleaning and CCTV analysis as an addendum to the Revised PER.

8. *Page 17: Please provide a more cost-effective and time-effective wastewater characterization. Please provide a cost estimate for a “bar screen only” headworks option.*

Based on conversation with Tom Andrews on November 7, 2007, the “bar screen only” option was eliminated from consideration due to the maintenance required and the limited availability of the Village staff for regular cleaning of the bar screen.

9. *Page 18: The Liquid Waste Management quote is based on what amount or depth of solids?*

The Liquid Waste Management quote is based on the removal of 7,000,000 gallons as seen in Appendix G of the Wastewater PER.

10. *Appendix F: Please re-evaluate the construction costs based on verification of the design flow. Please revise the professional service fees based on the fact that there are no environmental studies required if federal funds are not anticipated and the expected other fees should be in the 20 to 25% of the opinion of probably construction costs.*

The cost estimates have not been reduced due to the design flow. However, the professional service fees have been revised and the environmental study has been excluded. The revised cost estimates have replaced the original cost estimates in Appendix F.

11. *Appendix H: Please indicate the source and discuss the reliability and accuracy of the monthly wastewater flow graph (56,000 gpd – 70,000 gpd between 9/1/05 – 2/25/07).*

The wastewater flows seen in the “Monthly Wastewater Report” graph in Appendix H is generated from flow data collected daily by the operator at the Parshall flume. This daily wastewater report, which was replicated from data transferred to an excel spreadsheet, has been added to Appendix H. The precision of these readings is very low considering the operator can only measure the flume to the nearest 0.05 foot. Each change in 0.05 feet equals a change of 24,000gpd.

All new or revised information added to Appendices has been attached to this letter for your convenience.

Sincerely,

Thomas R. Repp, P.E.
Senior Project Manager
719-268-8522

Added to Appendix D:

Page 2 of Municipal Periodic Report

Sewer Form EP-1/EP-2 Enterprise and Utility Revenues/Transfers/Expenditures

*All financial data included in this report and the Wastewater PER was obtained directly from the Village of Cimarron and has not been modified by Nolte Associates, Inc.

New Mexico Department of Finance and Administration
Local Government Division
Budget Request Forms

INSTRUCTIONS - ENTERPRISE FUNDS

Column (C): Line Item and Department Codes correlate to LGD periodic financial reports.
 Column (D): Enter 6-30-05 year-end revenues & expenditures.
 Column (E): Enter 6-30-06 year-end revenues & expenditures.
 Column (F): Enter fiscal year 2007 approved operating budget revenues & expenditures including budget resolutions/adjustments.
 Column (G): Formula driven.
 Column (H): Enter fiscal year 2008 budget request.
 Column (I): Formula driven.

County/ Municipality:
VILLAGE OF CIMARRON

FORM EP- 1 / EP-2
 ENTERPRISE & UTILITY REVENUES/TRANSFERS/EXPENDITURES
 (ROUNDED TO NEAREST DOLLAR)

Entity Code:
 Fund Number: 500
 Fiscal Year: 2008

Sewer, Solid Waste & Water (TOTAL OF ALL UTILITIES)

(A) UTILITIES	(B) ACCT. CODE	* (C) LINE ITEM & DEPT. CODES	(D) 6-30-05 FISCAL YEAR ACTUAL	(E) 6-30-06 FISCAL YEAR ACTUAL	(F) F.Y 2007 APPROVED OPER. BUDGET INCL. ADJUST.	(G) % INCREASE (DECREASE) ((F - E) ÷ E)	(H) F.Y. 2008 BUDGET REQUEST	(I) % INCREASE (DECREASE) ((H - F) ÷ F)
Revenues:								
a) Utility - Services	34230	342302	300881	296517	318290	7%	329448	4%
b) Utility Services - Connections	34240	342302	0	7005	8000	14%	4206	-47%
c) Utility Services - Re-connections	34250	342302	0	0	150	#DIV/0!	0	-100%
d) Other Charges for Services	34990	342302	0	0	0	#DIV/0!	0	#DIV/0!
e) Investment Income	36030	342302	334	175	100	-43%	116	16%
f) Penalties	36050	342302	0	0	0	#DIV/0!	0	#DIV/0!
g) Sale - Other	36090	342302	0	1564	5100	226%	1039	-80%
Total Revenues (Carry to Recap)			301,215	305,261	331,640	9%	334,809	1%
Transfers in <out>:								
a) In	51000		0	0	0	#DIV/0!	0	#DIV/0!
b) Out	52000		0	0	0	#DIV/0!	0	#DIV/0!
Total Transfers (Carry to Recap)			301,215	304,377	312,893	3%	334,809	7%
Expenditures: MUNICIPALITY								
a) Salary & Wages	41XXX	21402	85850	71983	98526	37%	82715	-16%
b) Employee Benefits	42XXX	21402	32417	27266	34975	28%	33447	-4%
c) Travel	43XXX	21402	4647	4242	7700	82%	5100	-34%
d) Purchased Property Services	44XXX	21402	2675	7647	4500	-41%	4750	6%
e) Contractual Services	45XXX	21402	95347	92881	101640	9%	98000	-4%
f) Supplies	46XXX	21402	11447	14157	14350	1%	16755	17%
g) Other Operating Costs	47XXX	21402	14988	28848	20540	-29%	28699	40%
h) Capital Purchases	48XXX	21402	24585	17107	17526	2%	25259	44%
Expenditures: COUNTY								
a) Salary & Wages	41XXX	21401	0	0	0	#DIV/0!	0	#DIV/0!
b) Employee Benefits	42XXX	21401	0	0	0	#DIV/0!	0	#DIV/0!
c) Travel	43XXX	21401	0	0	0	#DIV/0!	0	#DIV/0!
d) Purchased Property Services	44XXX	21401	0	0	0	#DIV/0!	0	#DIV/0!
e) Contractual Services	45XXX	21401	0	0	0	#DIV/0!	0	#DIV/0!
f) Supplies	46XXX	21401	0	0	0	#DIV/0!	0	#DIV/0!
g) Other Operating Costs	47XXX	21401	0	0	0	#DIV/0!	0	#DIV/0!
h) Capital Purchases	48XXX	21401	0	0	0	#DIV/0!	0	#DIV/0!
Total Expenditures (Carry to Recap)			271,955	264,131	299,757	13%	294,726	-2%

Added to Appendix F:
Revised Cost Estimates



BEYOND ENGINEERING

Project: Wastewater System Improvements
Location: Cimarron, New Mexico
Subject: Cost Estimate for Aerated Lagoons
Client: Village of Cimarron

Date: Jan-2008
Job No.: CSB070002
Prep. By: MPT
Ckd. By: TRR

Aerated Lagoons

ITEM NO.	ITEM DESCRIPTION	UNITS	QUANTITY	UNIT PRICE	ITEM COST
1	Construction Survey	LS	1	\$ 50,000.00	\$ 50,000.00
2	Clearing and Grubbing, Light trees up to 6" diam.	Ac	1.70	\$ 2,667.50	\$ 4,532.00
3	Remove Existing Concrete	CY	28,000	\$ 2.95	\$ 82,544.00
4	Dividing Wall in Lagoons, Concrete	CY	373	\$ 475.00	\$ 177,334.00
5	Synthetic Liner on Lagoon	SF	261,360	\$ 0.40	\$ 104,544.00
6	Rip Rap, 9"	SY	2,467	\$ 65.00	\$ 160,334.00
7	Pipe Work to Connect Complete Mix to Partial Mix	LF	150	\$ 19.80	\$ 2,970.00
8	Pipe Work to Connect Partial Mix to Chlorination	LF	120	\$ 19.80	\$ 2,376.00
9	Outfall Structure	LS	1	\$ 20,000.00	\$ 20,000.00
10	Aeration Equipment for Complete and Partial Mix Lagoons	LS	1	\$ 50,000.00	\$ 50,000.00
11	Controls and Electrical Lines for Aeration Equipment	LS	1	\$ 120,000.00	\$ 120,000.00
12	Temporary Disinfection	LS	1	\$ 5,000.00	\$ 5,000.00
13	Bypass Pumping	LS	1	\$ 6,000.00	\$ 6,000.00
14					
15				Subtotal	\$ 785,634.00
16					
17	Engineering & Misc. Fees				
18	Civil Engineering/Survey	LS	1	\$ 100,000.00	\$ 100,000.00
19	Structural Engineering	LS	1	\$ 50,000.00	\$ 50,000.00
20	Electrical/Mechanical Engineering	LS	1	\$ 10,000.00	\$ 10,000.00
21	Geotechnical Analysis	LS	1	\$ 20,000.00	\$ 20,000.00
22	Legal	LS	1	\$ 5,000.00	\$ 5,000.00
				Professional Services Subtotal	\$ 185,000.00
				Subtotal	\$ 970,634.00
				Construction Observation	\$ 130,000.00
				15% Contingency	\$ 165,096.00
				Total Cost:	\$ 1,265,730.00

PROFESSIONAL ENGINEERING AND MISC. FEES ARE ROUGH ESTIMATES AND ARE INTENDED FOR BUDGETARY PURPOSES ONLY.
 A DETAILED COST ANALYSIS AND CONTRACT AGREEMENT SHALL BE COMPLETED FOR THE FINAL PROJECT EXECUTION.
 UNIT PRICES ARE ONLY GOOD FOR THREE (3) MONTHS FROM DATE OF REVISED PRELIMINARY ENGINEERING REPORT AND
 SHALL BE REEVALUATED AT THE TIME OF PROJECT EXECUTION.



BEYOND ENGINEERING

Project: Wastewater System Improvements
Location: Cimarron, New Mexico
Subject: Cost Estimate for Total Evaporative Lagoons
Client: Village of Cimarron

Date: Jan-2008
Job No.: CSB070002
Prep. By: MPT
Ckd. By: TRR

Total Evaporative Lagoons

ITEM NO.	ITEM DESCRIPTION	UNITS	QUANTITY	UNIT PRICE	ITEM COST
1	Construction Survey	LS	1	\$ 50,000.00	\$ 50,000.00
2	Clearing and Grubbing, Light trees up to 6" diam.	Ac	1.70	\$ 2,667.50	\$ 4,532.00
3	Excavation of New Lagoons, Bulk Scrapers	CY	316,213	\$ 10.00	\$ 3,162,134.00
4	Remove Existing Concrete	SF	28,000	\$ 2.95	\$ 82,544.00
5	Synthetic Liner on Lagoon	SF	2,439,360	\$ 0.40	\$ 975,744.00
6	Rip Rap, 9"	SY	6,028	\$ 65.00	\$ 391,806.00
7	Distribution Header, 8"	LF	2,630	\$ 60.00	\$ 157,800.00
8	Purchase 56 Additional Acres of Land	Ac	56	\$ 2,000.00	\$ 112,000.00
9	Temporary Disinfection	LS	1	\$ 5,000.00	\$ 5,000.00
10	Bypass Pumping	LS	1	\$ 6,000.00	\$ 6,000.00
11					
12				Subtotal	\$ 4,947,560.00
13					
14	Engineering & Misc. Fees				
15	Civil Engineering/Survey	LS	1	\$ 125,000.00	\$ 125,000.00
16	Structural Engineering	LS	1	\$ 75,000.00	\$ 75,000.00
17	Geotechnical Analysis	LS	1	\$ 30,000.00	\$ 30,000.00
18	Legal	LS	1	\$ 50,000.00	\$ 50,000.00
				Professional Services Subtotal	\$ 280,000.00
				Subtotal	\$ 5,227,560.00
				Construction Observation	\$ 130,000.00
				15% Contingency	\$ 803,634.00
				Total Cost:	\$ 6,161,194.00

PROFESSIONAL ENGINEERING AND MISC. FEES ARE ROUGH ESTIMATES AND ARE INTENDED FOR BUDGETARY PURPOSES ONLY.
 A DETAILED COST ANALYSIS AND CONTRACT AGREEMENT SHALL BE COMPLETED FOR THE FINAL PROJECT EXECUTION.
 UNIT PRICES ARE ONLY GOOD FOR THREE (3) MONTHS FROM DATE OF REVISED PRELIMINARY ENGINEERING REPORT AND
 SHALL BE REEVALUATED AT THE TIME OF PROJECT EXECUTION.

BEYOND ENGINEERING

Project: Wastewater System Improvements
Location: Cimarron, New Mexico
Subject: Cost Analysis
Client: Village of Cimarron

Date: Jan-2008
Job No.: CSB070002
Prep. By: MPT
Ckd. By: TRR

Cost Analysis

Project Alternative	Capital Cost	Annual O&M Cost	Present Worth of Annual O&M Costs Over 20yrs.*	Present Worth Total (20 Year) Cost
Aerated Lagoons	\$ 1,265,800	\$ 63,000	\$ 1,731,999	\$ 2,997,799
Total Evaporative Lagoons	\$ 6,161,200	\$ 35,000	\$ 962,222	\$ 7,123,422

*Cost calculated using "Real" federal discount rate from Appendix C of OMB Circular A-94

Operation and Maintenance Costs for **Aerated Lagoons**

Item Description	Price/Year
Employee Salary and Benefits	\$ 28,000
Regular Maintenance of System	\$ 5,000
Disinfection Costs	\$ 10,000
Electric Costs for Aerators, 26hp, 24hrs/day, \$0.10/KWH	\$ 20,000
Total	\$ 63,000

Operation and Maintenance Costs for **Total Evaporative Lagoons**

Item Description	Price/Year
Employee Salary and Benefits	\$ 28,000
Regular Maintenance of System	\$ 7,000
Total	\$ 35,000



BEYOND ENGINEERING

Project: Wastewater System Improvements
 Location: Cimarron, New Mexico
 Subject: Cost Estimate for Intermediate Headworks
 Client: Village of Cimarron

Date: Jan-2008
 Job No.: CSB070002
 Prep. By: MPT
 Ckd. By: TRR


Intermediate Projects - Update Headworks

ITEM NO.	ITEM DESCRIPTION	UNITS	QUANTITY	UNIT PRICE	ITEM COST
1	In-Channel Grinder	EA	1	\$ 120,000.00	\$ 120,000.00
2	3 Phase Power	LS	1	\$ 20,000.00	\$ 20,000.00
3	Equalization Basin	LS	1	\$ 30,000.00	\$ 30,000.00
4	Headloss Pumps	EA	2	\$ 80,000.00	\$ 160,000.00
5	Headworks Structure	LS	1	\$ 25,000.00	\$ 25,000.00
6	Controls	LS	1	\$ 25,000.00	\$ 25,000.00
7					
8				Subtotal	\$ 380,000.00
9					
10	Engineering & Misc. Fees				
11	Survey	LS	1	\$ 10,000.00	\$ 10,000.00
12	Easement Dedication	LS	1	\$ 6,000.00	\$ 6,000.00
13	Civil Engineering	LS	1	\$ 50,000.00	\$ 50,000.00
14	Structural Engineering	LS	1	\$ 15,000.00	\$ 15,000.00
15	Electrical/Mechanical Engineering	LS	1	\$ 15,000.00	\$ 15,000.00
16	Legal	LS	1	\$ 10,000.00	\$ 10,000.00
				Professional Services Subtotal	\$ 106,000.00
				Subtotal	\$ 486,000.00
				Construction Observation	\$ 65,000.00
				15% Contingency	\$ 82,650.00
				Total Cost:	\$ 633,650.00

PROFESSIONAL ENGINEERING AND MISC. FEES ARE ROUGH ESTIMATES AND ARE INTENDED FOR BUDGETARY PURPOSES ONLY.
 A DETAILED COST ANALYSIS AND CONTRACT AGREEMENT SHALL BE COMPLETED FOR THE FINAL PROJECT EXECUTION.
 UNIT PRICES ARE ONLY GOOD FOR THREE (3) MONTHS FROM DATE OF REVISED PRELIMINARY ENGINEERING REPORT AND
 SHALL BE REEVALUATED AT THE TIME OF PROJECT EXECUTION.

Added to Appendix G:
Lagoon Biosolids Depth Survey

Pond # 1

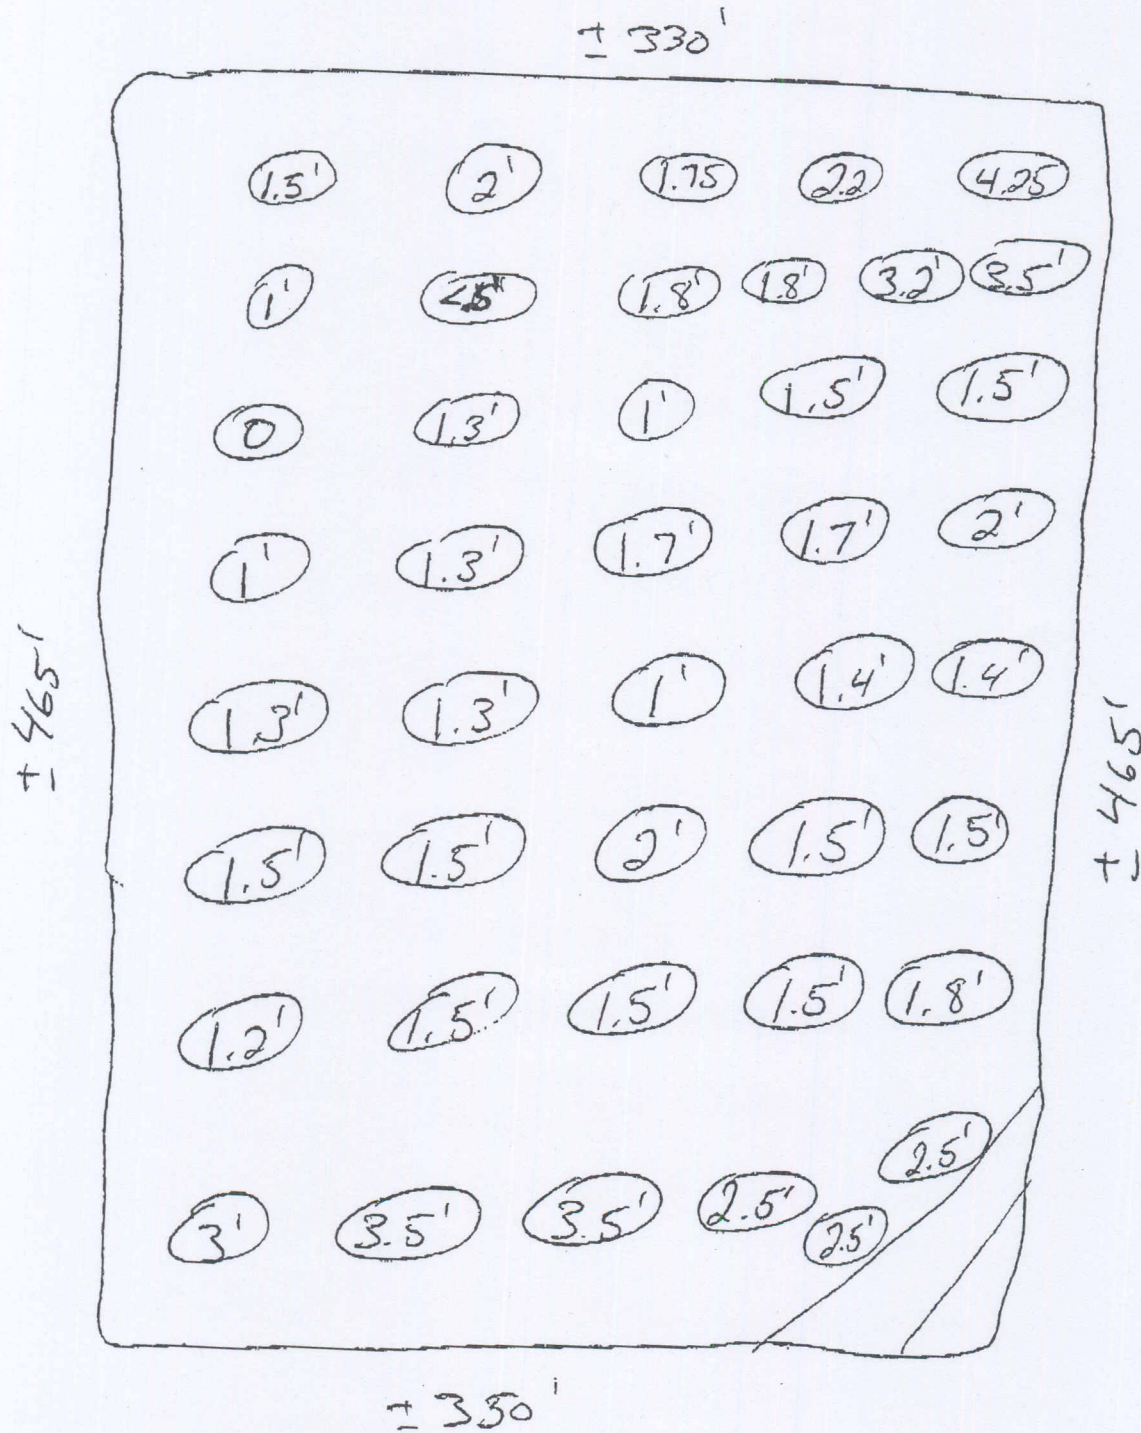


○ - Location of Probe and approximate depth of solids.

Cimarron, NM

Pond #2

± 185'

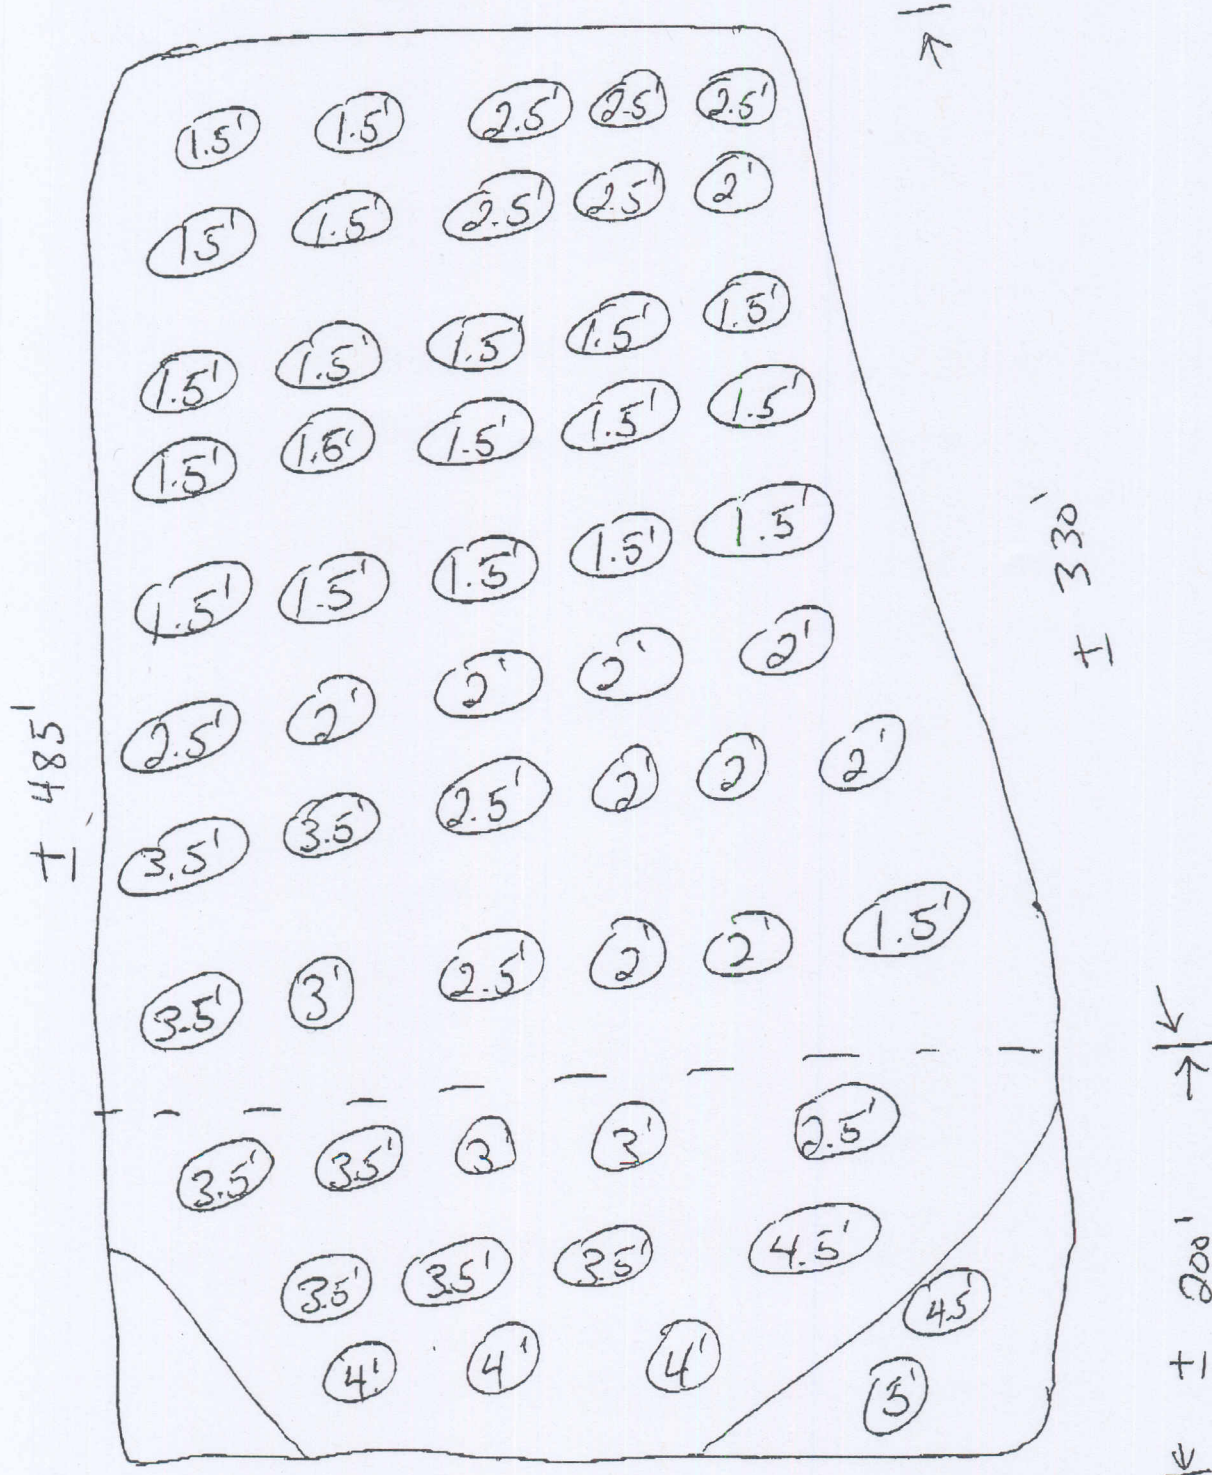

± 350'

O - location of probe & approximate depth of biosolids

Added to Appendix H:

Daily Wastewater Report

*This daily wastewater report was generated from daily observations transferred to an excel spreadsheet. The precision of these readings is low considering the operator can only measure the flume to the nearest 0.05 foot. Each change in 0.05 feet equals a change of 24,000gpd.

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
SEPTEMBER, 2005	9/1/05	8:20	LM	0.200	0.052	
	9/2/05	8:15	LM	0.250	0.076	
	9/3/05	8:25	LM	0.200	0.052	
	9/4/05	8:19	LM	0.200	0.052	
	9/5/05	8:20	LM	0.200	0.052	
	9/6/05	8:30	LM	0.200	0.052	
	9/7/05	9:00	LM	0.150	0.034	
	9/8/05	8:10	LM	0.200	0.052	
	9/9/05	8:10	LM	0.150	0.034	1,000 gal Haynie
	9/10/05	8:20	DC	0.150	0.034	
	9/11/05	8:54	DC	0.250	0.076	
	9/12/05	8:27	LM / DC	0.200	0.052	
	9/13/05	8:30	LM / DC	0.200	0.052	
	9/14/05	9:20	LM / DC	0.200	0.052	
	9/15/05	8:45	LM / DC	0.200	0.052	
	9/16/05	8:17	LM / DC	0.200	0.052	
	9/17/05	8:30	LM	0.200	0.052	
	9/18/05	8:11	LM	0.250	0.076	
	9/19/05	8:10	LM / DC	0.250	0.076	
	9/20/05	8:14	LM / DC	0.200	0.052	
	9/21/05	8:35	LM / DC	0.200	0.052	
	9/22/05	8:30	LM / DC	0.200	0.052	
	9/23/05	8:28	LM / DC	0.200	0.052	
	9/24/05	8:11	DC	0.250	0.076	
	9/25/05	8:40	DC	0.150	0.034	
	9/26/05	8:30	LM / DC	0.200	0.052	
	9/27/05	8:17	LM / DC	0.200	0.052	
	9/28/05	8:20	LM / DC	0.200	0.052	1,000 gal Haynie
	9/29/05	8:30	LM / DC	0.200	0.052	
	9/30/05	8:25	LM / DC	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
JANUARY, 2006	1/1/06	10:00	DC	0.200	0.052	
	1/2/06	8:30	LM	0.200	0.052	Discharged French Lake
	1/3/06	8:45	LM	0.250	0.076	Discharged French Lake
	1/4/06	8:30	LM	0.250	0.076	Discharged French Lake
	1/5/06	8:35	LM	0.200	0.052	Discharged French Lake
	1/6/06	9:00	LM	0.250	0.076	Discharged French Lake
	1/7/06	9:00	LM	0.200	0.052	Discharged French Lake
	1/8/06	8:35	LM	0.200	0.052	Discharged French Lake
	1/9/06	8:40	LM	0.250	0.076	
	1/10/06	8:20	LM	0.200	0.052	
	1/11/06	8:30	LM	0.150	0.034	
	1/12/06	8:35	LM	0.150	0.034	
	1/13/06	9:00	LM	0.150	0.034	
	1/14/06	9:00	DC	0.200	0.052	
	1/15/06	9:00	DC	0.250	0.076	
	1/16/06	8:40	LM	0.200	0.052	
	1/17/06	10:00	LM	0.200	0.052	
	1/18/06	8:15	LM	0.250	0.076	
	1/19/06	8:30	LM	0.150	0.034	
	1/20/06	8:35	LM	0.150	0.034	
	1/21/06	8:10	LM	0.200	0.052	
	1/22/06	8:45	LM	0.150	0.034	
	1/23/06	8:45	LM	0.200	0.052	
	1/24/06	9:00	LM	0.150	0.034	
	1/25/06	9:00	LM	0.200	0.052	
	1/26/06	9:00	LM	0.250	0.076	
	1/27/06	8:35	LM	0.200	0.052	
	1/28/06	9:00	DC	0.200	0.052	
	1/29/06	9:00	DC	0.300	0.1	
	1/30/06	8:40	LM	0.250	0.076	
	1/31/06	9:00	LM	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
FEBRUARY, 2006	2/1/06	9:30	LM	0.150	0.034	
	2/2/06	9:00	LM	0.250	0.076	
	2/3/06	9:00	LM	0.200	0.052	
	2/4/06	8:30	LM	0.250	0.076	
	2/5/06	8:30	LM	0.200	0.052	
	2/6/06	9:00	LM	0.200	0.052	
	2/7/06	9:20	LM	0.250	0.076	
	2/8/06	9:00	LM	0.200	0.052	
	2/9/06	8:30	LM	0.250	0.076	
	2/10/06	8:35	LM	0.200	0.052	
	2/11/06	8:30	DC	0.200	0.052	
	2/12/06	10:00	DC	0.150	0.034	
	2/13/06	9:00	LM	0.150	0.034	
	2/14/06	9:15	LM	0.200	0.052	
	2/15/06	8:30	LM	0.200	0.052	
	2/16/06	8:30	LM	0.250	0.076	
	2/17/06	8:30	LM	0.250	0.076	
	2/18/06	9:35	AF	0.200	0.052	
	2/19/06	8:45	AF	0.200	0.052	
	2/20/06	8:30	LM	0.150	0.034	
	2/21/06	8:45	LM	0.150	0.034	
	2/22/06	9:00	LM	0.200	0.052	
	2/23/06	8:30	LM	0.200	0.052	
	2/24/06	8:30	LM	0.200	0.052	
	2/25/06	8:30	LM	0.150	0.034	
	2/26/06	8:15	LM	0.250	0.076	
	2/27/06	9:00	LM	0.250	0.076	
	2/28/06	9:00	LM	0.250	0.076	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
MARCH, 2006	3/1/06	9:00	LM	0.200	0.052	
	3/2/06	9:00	LM	0.250	0.076	
	3/3/06	9:00	LM	0.250	0.076	
	3/4/06	9:30	AF	0.200	0.052	
	3/5/06	9:30	AF	0.200	0.052	
	3/6/06	8:10	LM	0.150	0.034	
	3/7/06	9:00	LM	0.200	0.052	
	3/8/06	8:25	LM	0.250	0.076	
	3/9/06	8:15	LM	0.250	0.076	
	3/10/06	9:00	LM	0.200	0.052	
	3/11/06	9:30	DC	0.200	0.052	
	3/12/06	9:30	DC	0.200	0.052	
	3/13/06	8:30	LM	0.250	0.076	
	3/14/06	8:30	LM	0.250	0.076	
	3/15/06	8:15	LM	0.200	0.052	
	3/16/06	8:25	LM	0.200	0.052	
	3/17/06	8:20	LM	0.200	0.052	
	3/18/06	8:10	LM	0.150	0.034	
	3/19/06	8:35	LM	0.200	0.052	
	3/20/06	9:00	AF, DC	0.250	0.076	
	3/21/06	9:10	AF, DC	0.250	0.076	
	3/22/06	8:35	AF, DC	0.200	0.052	
	3/23/06	8:30	AF, DC	0.250	0.076	
	3/24/06	8:35	LM, AF	0.200	0.052	
	3/25/06	9:00	AF	0.200	0.052	
	3/26/06	9:00	AF	0.200	0.052	
	3/27/06	8:35	LM	0.250	0.076	
	3/28/06	8:30	LM	0.200	0.052	
	3/29/06	8:30	LM	0.200	0.052	
	3/30/06	8:15	LM	0.200	0.052	1,000 gal Art Garcia
	3/31/06	9:25	DC, AF	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
APRIL, 2006	4/1/06	9:10	DC	0.250	0.076	
	4/2/06	9:31	DC	0.200	0.052	
	4/3/06	8:30	LM	0.250	0.076	750 Gal Becky Berala 1,000 gal Vermejo Ranch
	4/4/06	8:21	LM	0.200	0.052	
	4/5/06	9:45	LM	0.200	0.052	
	4/6/06	9:01	DC, AF	0.200	0.052	
	4/7/06	8:19	DC, AF	0.250	0.076	
	4/8/06	8:23	DC	0.250	0.076	
	4/9/06	8:57	DC	0.200	0.052	
	4/10/06	8:25	DC, AF	0.250	0.076	
	4/11/06	8:17	DC, AF	0.300	0.1	
	4/12/06	9:30	DC, AF	0.250	0.076	
	4/13/06	9:21	DC, AF	0.250	0.076	
	4/14/06	9:17	DC, AF	0.200	0.052	
	4/15/06	10:21	AF	0.200	0.052	
	4/16/06	11:00	DC	0.200	0.052	
	4/17/06	10:15	DC, AF	0.250	0.076	
	4/18/06	9:23	DC, AF	0.300	0.1	
	4/19/06	9:15	DC, AF	0.200	0.052	
	4/20/06	9:01	DC, AF	0.250	0.076	
	4/21/06	11:21	DC, AF	0.200	0.052	
	4/22/06	8:31	DC, AF	0.200	0.052	
	4/23/06	10:11	DC, AF	0.200	0.052	
	4/24/06	9:30	DC, AF	0.250	0.076	
	4/25/06	14:15	DC, AF	0.200	0.052	
	4/26/06	10:01	DC	0.250	0.076	1,000 gal Vermejo Park
	4/27/06	9:27	DC	0.200	0.052	3,000 gal Vermejo Park
	4/28/06	9:30	DC	0.300	0.1	
	4/29/06	11:15	DC	0.250	0.076	
	4/30/06	11:21	DC	0.250	0.076	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
MAY, 2006	5/1/06	8:30	DC	0.200	0.052	
	5/2/06	8:35	DC	0.200	0.052	
	5/3/06	8:30	DC	0.200	0.052	
	5/4/06	8:20	DC	0.250	0.076	
	5/5/06	8:40	DC	0.200	0.052	
	5/6/06	8:30	DC	0.200	0.052	
	5/7/06	8:35	DC	0.250	0.076	
	5/8/06	8:35	DC	0.250	0.076	
	5/9/06	8:25	DC	0.200	0.052	
	5/10/06	8:25	DC	0.200	0.052	
	5/11/06	8:30	DC	0.250	0.076	
	5/12/06	8:25	DC	0.250	0.076	
	5/13/06	8:30	DC	0.200	0.052	
	5/14/06	8:30	DC	0.250	0.076	
	5/15/06	8:30	DC	0.250	0.076	
	5/16/06	8:35	DC	0.200	0.052	
	5/17/06	8:37	DC	0.200	0.052	
	5/18/06	8:30	DC	0.200	0.052	
	5/19/06	8:15	DC	0.250	0.076	
	5/20/06	8:20	DC	0.250	0.076	
	5/21/06	8:25	DC	0.200	0.052	
	5/22/06	8:25	DC	0.200	0.052	
	5/23/06	8:30	DC	0.200	0.052	
	5/24/06	8:35	DC	0.200	0.052	
	5/25/06	8:50	DC	0.150	0.034	
	5/26/06	8:45	DC	0.200	0.052	
	5/27/06	8:30	DC	0.200	0.052	
	5/28/06	8:35	DC	0.200	0.052	
	5/29/06	8:45	DC	0.200	0.052	
	5/30/06	8:45	DC	0.200	0.052	
	5/31/06	8:30	DC	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
JUNE, 2006	6/1/06	9:00	DC	0.200	0.052	
	6/2/06	9:10	DC	0.200	0.052	
	6/3/06	9:30	DC	0.150	0.034	
	6/4/06	8:10	DC	0.200	0.052	
	6/5/06	8:30	DC	0.200	0.052	
	6/6/06	8:45	DC	0.200	0.052	
	6/7/06	9:00	DC	0.250	0.076	
	6/8/06	9:05	DC	0.250	0.076	
	6/9/06	9:10	DC	0.200	0.052	
	6/10/06	9:00	DC	0.200	0.052	
	6/11/06	8:45	DC	0.250	0.076	
	6/12/06	8:30	DC	0.200	0.052	
	6/13/06	8:30	DC	0.200	0.052	
	6/14/06	8:15	DC	0.250	0.076	
	6/15/06	8:50	DC	0.150	0.034	
	6/16/06	9:00	DC	0.200	0.052	
	6/17/06	8:20	DC	0.250	0.076	
	6/18/06	9:30	DC	0.200	0.052	
	6/19/06	9:00	DC	0.200	0.052	
	6/20/06	8:45	DC	0.200	0.052	
	6/21/06	9:10	DC	0.200	0.052	
	6/22/06	9:10	DC	0.250	0.076	
	6/23/06	9:00	DC	0.250	0.076	
	6/24/06	8:15	DC	0.300	0.1	
	6/25/06	8:15	DC	0.300	0.1	
	6/26/06	8:25	DC	0.250	0.076	
	6/27/06	8:15	DC	0.250	0.076	
	6/28/06	8:40	DC	0.200	0.052	
	6/29/06	8:20	DC	0.250	0.076	
	6/30/06	8:30	DC	0.250	0.076	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
JULY, 2006	7/1/06	9:15	DC	0.300	0.1	
	7/2/06	9:00	DC	0.300	0.1	
	7/3/06	8:35	DC	0.250	0.076	
	7/4/06	10:00	DC	0.200	0.052	
	7/5/06	9:35	DC	0.300	0.1	
	7/6/06	9:00	DC	0.300	0.1	
	7/7/06	8:40	DC	0.250	0.076	
	7/8/06	10:00	DC	0.200	0.052	
	7/9/06	10:00	DC	0.200	0.052	
	7/10/06	8:30	LM	0.200	0.052	
	7/11/06	8:35	LM	0.200	0.052	
	7/12/06	8:20	LM	0.200	0.052	
	7/13/06	9:00	LM	0.250	0.076	
	7/14/06	8:25	LM	0.300	0.1	
	7/15/06	10:00	JS	0.250	0.076	
	7/16/06	9:30	JS	0.250	0.076	
	7/17/06	8:15	LM	0.200	0.052	
	7/18/06	8:25	LM	0.300	0.1	
	7/19/06	9:00	LM	0.200	0.052	
	7/20/06	10:45	LM	0.200	0.052	
	7/21/06	9:15	LM	0.200	0.052	
	7/22/06	9:00	JW	0.250	0.076	
	7/23/06	9:30	JW	0.200	0.052	
	7/24/06	8:40	LM	0.300	0.1	
	7/25/06	8:10	LM	0.300	0.1	
	7/26/06	9:20	LM	0.200	0.052	
	7/27/06	8:20	LM	0.250	0.076	
	7/28/06	10:00	LM	0.300	0.1	
	7/29/06	9:30	DC	0.200	0.052	
	7/30/06	9:00	DC	0.200	0.052	
	7/31/06	8:30	LM	0.300	0.1	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
AUGUST, 2006	8/1/06	9:00	LM	0.250	0.076	
	8/2/06	9:00	LM	0.200	0.052	
	8/3/06	9:30	LM	0.300	0.1	
	8/4/06	8:30	LM	0.250	0.076	
	8/5/06	10:00	JS	0.200	0.052	
	8/6/06	7:45	JS	0.200	0.052	
	8/7/06	8:30	LM	0.250	0.076	
	8/8/06	8:15	LM	0.300	0.1	
	8/9/06	9:00	LM	0.300	0.1	
	8/10/06	9:00	LM	0.200	0.052	
	8/11/06	9:15	LM	0.150	0.034	
	8/12/06	10:00	DC	0.200	0.052	
	8/13/06	9:00	DC	0.150	0.034	
	8/14/06	8:10	LM	0.200	0.052	
	8/15/06	9:30	LM	0.300	0.1	
	8/16/06	9:20	LM	0.300	0.1	
	8/17/06	8:15	LM	0.250	0.076	
	8/18/06	8:20	LM	0.200	0.052	
	8/19/06	10:00	JS	0.150	0.034	
	8/20/06	9:30	JS	0.200	0.052	
	8/21/06	8:10	LM	0.250	0.076	
	8/22/06	8:30	LM	0.250	0.076	
	8/23/06	8:30	LM	0.250	0.076	
	8/24/06	9:00	LM	0.200	0.052	
	8/25/06	9:00	LM	0.200	0.052	
	8/26/06	10:00	DC	0.150	0.034	
	8/27/06	9:20	DC	0.200	0.052	
	8/28/06	8:30	LM	0.250	0.076	2,000 gal,
	8/29/06	8:10	LM	0.250	0.076	
	8/30/06	8:15	LM	0.250	0.076	
	8/31/06	8:10	LM	0.250	0.076	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
SEPTEMBER, 2006	9/1/06	8:30	LM	0.200	0.052	
	9/2/06	8:00	DC	0.250	0.076	
	9/3/06	8:15	DC	0.250	0.076	
	9/4/06	9:10	LM	0.200	0.052	
	9/5/06	8:05	LM	0.200	0.052	
	9/6/06	8:30	LM	0.250	0.076	
	9/7/06	9:15	LM	0.250	0.076	
	9/8/06	8:20	LM	0.200	0.052	
	9/9/06	8:05	LM	0.300	0.100	
	9/10/06	8:10	LM	0.250	0.076	
	9/11/06	8:20	LM	0.250	0.076	
	9/12/06	9:00	LM	0.250	0.076	
	9/13/06	9:20	LM	0.200	0.052	
	9/14/06	9:10	LM	0.200	0.052	2000 Vermejo Park
	9/15/06	8:20	LM	0.200	0.052	
	9/16/06	8:30	JJ	0.200	0.052	
	9/17/06	9:00	JJ	0.300	0.100	
	9/18/06	9:00	LM	0.300	0.100	Discharged 0.15
	9/19/06	9:10	DC	0.200	0.052	Discharged 0.15
	9/20/06	9:15	DC	0.200	0.052	Discharged 0.15
	9/21/06	9:00	DC	0.250	0.076	Discharged 0.15
	9/22/06	8:35	DC	0.250	0.076	Discharged 0.15
	9/23/06	8:30	DC	0.250	0.076	Discharged 0.15
	9/24/06	8:25	DC	0.250	0.076	Discharged 0.15
	9/25/06	8:25	LM	0.200	0.052	Discharged 0.15
	9/26/06	8:30	LM	0.200	0.052	
	9/27/06	9:00	LM	0.300	0.100	1000 Ponil Camp Ground
	9/28/06	9:00	LM	0.250	0.076	1000 Patrick LeDoux
	9/29/06	9:15	LM	0.300	0.100	
	9/30/06	9:00	LM	0.250	0.076	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
OCTOBER, 2006	10/1/06	9:00	LM	0.200	0.052	
	10/2/06	9:00	LM	0.200	0.052	
	10/3/06	9:05	LM	0.250	0.076	
	10/4/06	9:10	LM	0.200	0.052	
	10/5/06	9:00	LM	0.150	0.034	
	10/6/06	9:30	DC	0.200	0.052	
	10/7/06	10:00	JJ	0.200	0.052	
	10/8/06	9:30	JJ	0.250	0.076	
	10/9/06	9:30	JJ	0.200	0.052	
	10/10/06	8:10	LM	0.250	0.076	
	10/11/06	8:15	LM	0.200	0.052	
	10/12/06	8:15	LM	0.200	0.052	
	10/13/06	8:20	LM	0.250	0.076	
	10/14/06	9:30	DC	0.200	0.052	
	10/15/06	9:30	DC	0.250	0.076	
	10/16/06	9:00	LM	0.200	0.052	
	10/17/06	9:20	DC / JS	0.200	0.052	
	10/18/06	9:10	DC / JS	0.200	0.052	
	10/19/06	9:00	DC / JS	0.250	0.076	
	10/20/06	9:10	DC / JS	0.200	0.052	
	10/21/06	9:30	JJ	0.150	0.034	
	10/22/06	9:15	DC	0.200	0.052	
	10/23/06	8:20	LM	0.200	0.052	
	10/24/06	8:20	LM	0.250	0.076	
	10/25/06	8:15	LM	0.200	0.052	
	10/26/06	8:15	LM	0.200	0.052	
	10/27/06	8:20	LM	0.300	0.076	
	10/28/06	9:30	JS	0.200	0.052	
	10/29/06	9:35	JS	0.200	0.052	
	10/30/06	8:10	LM	0.200	0.052	
	10/31/06	8:10	LM	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
NOVEMBER, 2006	11/1/06	8:30	LM	0.250	0.076	
	11/2/06	8:30	LM	0.250	0.076	
	11/3/06	8:35	LM	0.250	0.076	
	11/4/06	8:30	LM	0.200	0.052	
	11/5/06	9:00	DC	0.200	0.052	
	11/6/06	8:20	LM	0.200	0.052	
	11/7/06	8:20	LM	0.250	0.076	
	11/8/06	8:25	LM	0.200	0.052	
	11/9/06	8:30	LM	0.200	0.052	
	11/10/06	8:30	LM	0.250	0.076	
	11/11/06	8:20	LM	0.200	0.052	
	11/12/06	8:10	LM	0.250	0.076	
	11/13/06	8:25	LM	0.250	0.076	
	11/14/06	8:25	LM	0.250	0.076	
	11/15/06	8:30	LM	0.200	0.052	
	11/16/06	8:30	LM	0.250	0.076	
	11/17/06	9:00	DCJS	0.250	0.076	
	11/18/06	9:00	JS	0.250	0.076	
	11/19/06	9:10	JS	0.200	0.052	
	11/20/06	8:35	LM	0.200	0.052	
	11/21/06	8:30	LM	0.250	0.076	
	11/22/06	8:30	LM	0.200	0.052	
	11/23/06	9:30	JS	0.250	0.076	
	11/24/06	9:20	DC	0.250	0.076	
	11/25/06	9:30	DC	0.200	0.052	
	11/26/06	10:00	DC	0.250	0.076	
	11/27/06	9:00	LM	0.250	0.076	
	11/28/06	8:15	LM	0.250	0.076	
	11/29/06	8:30	LM	0.200	0.052	
	11/30/06	8:30	LM	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
DECEMBER, 2006	12/1/06	8:01	LM	0.200	0.052	
	12/2/06	8:10	LM	0.150	0.034	
	12/3/06	8:10	LM	0.150	0.034	
	12/4/06	8:20	LM	0.200	0.052	
	12/5/06	8:15	LM	0.200	0.052	
	12/6/06	8:20	LM	0.200	0.052	
	12/7/06	8:30	LM	0.250	0.076	
	12/8/06	8:30	LM	0.200	0.052	
	12/9/06	8:28	JS	0.250	0.076	
	12/10/06	8:30	JS	0.250	0.076	
	12/11/06	8:20	LM	0.200	0.052	
	12/12/06	8:15	LM	0.150	0.034	
	12/13/06	8:20	LM	0.200	0.052	
	12/14/06	8:15	LM	0.250	0.076	
	12/15/06	8:25	LM	0.250	0.076	
	12/16/06	8:30	DC	0.300	0.100	
	12/17/06	8:18	DC	0.250	0.076	
	12/18/06	8:30	LM	0.200	0.052	
	12/19/06	8:36	LM	0.250	0.076	
	12/20/06	8:05	LM	0.250	0.076	
	12/21/06	8:00	LM	0.200	0.052	
	12/22/06	8:15	LM	0.200	0.052	
	12/23/06	8:30	LM	0.250	0.076	
	12/24/06	8:20	LM	0.200	0.052	
	12/25/06	8:21	LM	0.200	0.052	
	12/26/06	8:30	LM	0.200	0.052	
	12/27/06	8:05	LM	0.250	0.076	
	12/28/06	8:30	LM	0.300	0.100	
	12/29/06	8:30	LM	0.300	0.100	
	12/30/06	8:20	JS	0.250	0.076	
	12/31/06	8:05	JS	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

JANUARY, 2007	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
	1/1/07	8:05	LM	0.300	0.100	
	1/2/07	8:05	LM	0.300	0.100	
	1/3/07	9:00	LM	0.250	0.076	
	1/4/07	8:55	LM	0.200	0.052	
	1/5/07	9:00	LM	0.250	0.076	
	1/6/07	8:10	DC	0.200	0.052	
	1/7/07	8:15	DC	0.200	0.052	
	1/8/07	8:10	LM	0.300	0.100	
	1/9/07	8:15	LM	0.300	0.100	
	1/10/07	8:15	LM	0.250	0.076	
	1/11/07	8:30	LM	0.200	0.052	
	1/12/07	8:35	LM	0.200	0.052	
	1/13/07	8:10	LM	0.200	0.052	
	1/14/07	8:20	LM	0.200	0.052	
	1/15/07	8:25	LM	0.250	0.076	
	1/16/07	8:15	LM	0.200	0.052	
	1/17/07	8:11	LM	0.250	0.076	
	1/18/07	8:16	LM	0.200	0.052	
	1/19/07	8:22	LM	0.250	0.076	
	1/20/07	8:15	JS	0.300	0.100	
	1/21/07	8:20	JS	0.300	0.100	
	1/22/07	8:20	LM	0.250	0.076	
	1/23/07	8:15	LM	0.200	0.052	
	1/24/07	8:26	LM	0.250	0.076	
	1/25/07	8:30	LM	0.200	0.052	
	1/26/07	8:15	LM	0.250	0.076	
	1/27/07	8:20	DC	0.300	0.100	
	1/28/07	8:21	DC	0.300	0.100	
	1/29/07	8:08	LM	0.250	0.076	
	1/30/07	8:15	LM	0.250	0.076	
1/31/07	8:26	LM	0.250	0.076		

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
FEBRUARY, 2007	2/1/07	9:00	LM	0.200	0.052	
	2/2/07	8:30	LM	0.200	0.052	
	2/3/07	8:30	LM	0.200	0.052	
	2/4/07	8:20	LM	0.250	0.076	
	2/5/07	8:10	LM	0.250	0.076	
	2/6/07	8:15	LM	0.250	0.076	
	2/7/07	8:30	LM	0.200	0.052	
	2/8/07	8:15	LM	0.200	0.052	
	2/9/07	8:20	LM	0.150	0.034	
	2/10/07	8:36	LM	0.200	0.052	
	2/11/07	9:00	LM	0.250	0.076	
	2/12/07	9:10	LM	0.250	0.076	
	2/13/07	8:15	LM	0.250	0.076	
	2/14/07	8:20	LM	0.300	0.100	
	2/15/07	8:22	LM	0.300	0.100	
	2/16/07	8:18	LM	0.300	0.100	
	2/17/07	8:20	LM	0.250	0.076	
	2/18/07	8:16	LM	0.250	0.076	
	2/19/07	8:15	LM	0.250	0.076	
	2/20/07	8:20	LM	0.200	0.052	
	2/21/07	8:26	LM	0.250	0.076	
	2/22/07	8:20	LM	0.200	0.052	
	2/23/07	8:25	LM	0.300	0.100	
	2/24/07	8:15	LM	0.200	0.052	
	2/25/07	8:30	LM	0.250	0.076	
	2/26/07	8:30	LM	0.250	0.076	
	2/27/07	8:20	LM	0.200	0.052	
	2/28/07	8:15	LM	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
MARCH, 2007	3/1/07	8:30	LM	0.200	0.052	
	3/2/07	8:30	LM	0.200	0.052	
	3/3/07	9:00	DC	0.250	0.076	
	3/4/07	9:00	DC	0.250	0.076	
	3/5/07	8:30	LM	0.200	0.052	
	3/6/07	8:45	LM	0.200	0.052	
	3/7/07	8:30	LM	0.200	0.052	
	3/8/07	8:25	LM	0.200	0.052	
	3/9/07	8:25	LM	0.250	0.076	
	3/10/07	8:30	LM	0.200	0.052	
	3/11/07	8:25	LM	0.300	0.1	
	3/12/07	8:30	LM	0.200	0.052	
	3/13/07	8:30	LM	0.200	0.052	
	3/14/07	8:33	LM	0.200	0.052	L.A. Whitten, 1,000 gal.
	3/15/07	8:20	LM	0.200	0.052	
	3/16/07	9:00	DC	0.150	0.034	
	3/17/07	9:00	DC	0.300	0.1	
	3/18/07	9:00	DC	0.250	0.076	
	3/19/07	8:40	LM	0.200	0.052	Whitten, 2,000 gal.
	3/20/07	8:30	LM	0.250	0.076	
	3/21/07	8:25	LM	0.250	0.076	
	3/22/07	8:30	LM	0.200	0.052	
	3/23/07	8:30	LM	0.200	0.052	
	3/24/07	8:30	LM	0.200	0.052	
	3/25/07	9:26	LM	0.150	0.034	
	3/26/07	8:20	LM	0.200	0.052	Vermejo 1,000 gal
	3/27/07	8:20	LM	0.200	0.052	
	3/28/07	8:30	LM	0.250	0.076	
	3/29/07	8:15	LM	0.250	0.076	1,000 gal Ron Welch
	3/30/07	9:00	DC	0.250	0.076	
	3/31/07	9:15	DC	0.250	0.076	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
APRIL, 2007	4/1/07	8:50	LM	0.200	0.052	
	4/2/07	9:00	LM	0.200	0.052	
	4/3/07	8:30	LM	0.200	0.052	
	4/4/07	8:30	LM	0.200	0.052	
	4/5/07	8:25	LM	0.200	0.052	
	4/6/07	8:30	LM	0.200	0.052	
	4/7/07	8:35	LM	0.200	0.052	
	4/8/07	9:00	LM	0.250	0.076	
	4/9/07	9:05	LM	0.250	0.076	
	4/10/07	8:30	LM	0.200	0.052	
	4/11/07	8:30	LM	0.200	0.052	
	4/12/07	8:20	LM	0.200	0.052	
	4/13/07	9:00	DC	0.200	0.052	
	4/14/07	9:00	DC	0.300	0.1	
	4/15/07	9:00	DC	0.200	0.052	
	4/16/07	8:30	LM	0.200	0.052	
	4/17/07	8:25	LM	0.250	0.076	
	4/18/07	8:45	LM	0.200	0.052	
	4/19/07	8:40	LM	0.200	0.052	
	4/20/07	8:45	LM	0.300	0.1	
	4/21/07	8:20	LM	0.300	0.1	
	4/22/07	9:30	LM	0.300	0.1	
	4/23/07	8:20	LM	0.200	0.052	
	4/24/07	8:15	LM	0.200	0.052	
	4/25/07	8:30	LM	0.200	0.052	
	4/26/07	8:35	LM	0.200	0.052	Vermejo Park 1,000 gal
	4/27/07	8:20	DC	0.250	0.076	Vermejo Ranch 3,000 gal
	4/28/07	9:00	DC	0.250	0.076	
	4/29/07	9:00	DC	0.300	0.1	
	4/30/07	8:45	LM	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
MAY, 2007	5/1/07	8:05	LM	0.200	0.052	
	5/2/07	8:05	LM	0.200	0.052	
	5/3/07	9:00	LM	0.300	0.1	
	5/4/07	9:00	LM	0.300	0.1	
	5/5/07	8:20	LM	0.200	0.052	
	5/6/07	8:20	LM	0.250	0.076	
	5/7/07	8:25	LM	0.200	0.052	
	5/8/07	8:45	LM	0.200	0.052	
	5/9/07	9:00	LM	0.200	0.052	
	5/10/07	8:22	DC	0.200	0.052	
	5/11/07	8:30	DC	0.250	0.076	
	5/12/07	9:00	DC	0.250	0.076	
	5/13/07	9:00	DC	0.300	0.1	
	5/14/07	8:20	LM	0.250	0.076	
	5/15/07	8:30	LM	0.250	0.076	
	5/16/07	8:30	LM	0.250	0.076	
	5/17/07	8:30	LM	0.200	0.052	
	5/18/07	8:45	LM	0.200	0.052	
	5/19/07	8:17	LM	0.200	0.052	
	5/20/07	8:30	LM	0.200	0.052	
	5/21/07	9:00	LM	0.250	0.076	
	5/22/07	9:00	LM	0.200	0.052	
	5/23/07	8:45	LM	0.150	0.034	
	5/24/07	8:20	LM	0.200	0.052	
	5/25/07	9:00	DC	0.200	0.052	
	5/26/07	9:05	DC	0.300	0.1	
	5/27/07	9:00	DC	0.250	0.076	
	5/28/07	9:20	LM	0.200	0.052	
	5/29/07	8:30	LM	0.200	0.052	
	5/30/07	8:30	LM	0.200	0.052	
	5/31/07	8:30	LM	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
JULY, 2007	7/1/07	8:30	LM	0.200	0.052	
	7/2/07	8:30	LM	0.200	0.052	
	7/3/07	9:00	LM	0.200	0.052	
	7/4/07	9:30	DC	0.150	0.034	
	7/5/07	10:00	DC	0.150	0.034	
	7/6/07	8:40	LM	0.200	0.052	
	7/7/07	9:00	JS	0.250	0.076	
	7/8/07	9:10	JS	0.250	0.076	
	7/9/07	9:00	LM	0.200	0.052	
	7/10/07	8:15	LM	0.250	0.076	
	7/11/07	8:00	LM	0.200	0.052	
	7/12/07	8:45	LM	0.200	0.052	
	7/13/07	9:00	LM	0.200	0.052	
	7/14/07	8:40	LM	0.200	0.052	
	7/15/07	8:30	LM	0.200	0.052	
	7/16/07	8:30	LM	0.200	0.052	
	7/17/07	8:30	LM	0.200	0.052	
	7/18/07	8:30	LM	0.200	0.052	
	7/19/07	8:10	LM	0.250	0.076	
	7/20/07	9:00	DC	0.300	0.1	
	7/21/07	9:15	DC	0.300	0.1	
	7/22/07	9:00	DC	0.250	0.076	
	7/23/07	8:30	LM	0.200	0.052	
	7/24/07	8:35	LM	0.200	0.052	
	7/25/07	8:35	LM	0.200	0.052	
	7/26/07	8:30	LM	0.200	0.052	
	7/27/07	8:30	LM	0.200	0.052	
	7/28/07	9:15	JS	0.250	0.076	
	7/29/07	10:00	JS	0.150	0.034	
	7/30/07	8:30	LM	0.200	0.052	
	7/31/07	8:30	LM	0.200	0.052	

MONTHLY WASTEWATER REPORT / MILLION GAL. per DAY

	DATE	TIME	INITIAL	INLET (ft)	MGD	SEWAGE LOADS DUMPED
AUG., 2007	8/1/07	8:30	LM	0.200	0.052	
	8/2/07	8:05	LM	0.200	0.052	
	8/3/07	8:00	LM	0.250	0.076	
	8/4/07	8:15	LM	0.200	0.052	
	8/5/07	8:15	LM	0.200	0.052	
	8/6/07	8:18	LM	0.200	0.052	
	8/7/07	8:30	LM	0.200	0.052	
	8/8/07	9:00	LM	0.200	0.052	
	8/9/07	9:00	LM	0.200	0.052	
	8/10/07	9:00	DC/JM	0.300	0.1	
	8/11/07	9:10	DC	0.250	0.076	
	8/12/07	9:00	DC	0.250	0.076	
	8/13/07	8:30	LM	0.250	0.076	
	8/14/07	8:30	LM	0.250	0.076	
	8/15/07	8:20	LM	0.200	0.052	
	8/16/07	8:20	LM	0.200	0.052	
	8/17/07	8:30	LMJS	0.200	0.052	
	8/18/07	9:00	JS	0.250	0.076	
	8/19/07	9:30	JS	0.250	0.076	
	8/20/07	8:00	LM	0.200	0.052	
	8/21/07	8:30	LM	0.200	0.052	
	8/22/07	8:35	LM	0.200	0.052	
	8/23/07	8:35	LM	0.200	0.052	
	8/24/07	8:30	LM	0.200	0.052	
	8/25/07	8:15	LM	0.200	0.052	
	8/26/07	8:00	LM	0.200	0.052	
	8/27/07	8:00	LM	0.200	0.052	
	8/28/07	7:45	LM	0.250	0.076	
	8/29/07	8:00	LM	0.200	0.052	
	8/30/07	8:10	LM	0.200	0.052	
	8/31/07	8:15	LM	0.200	0.052	

